
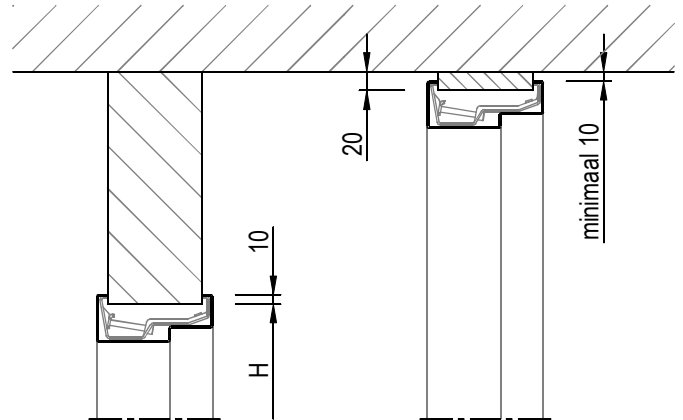
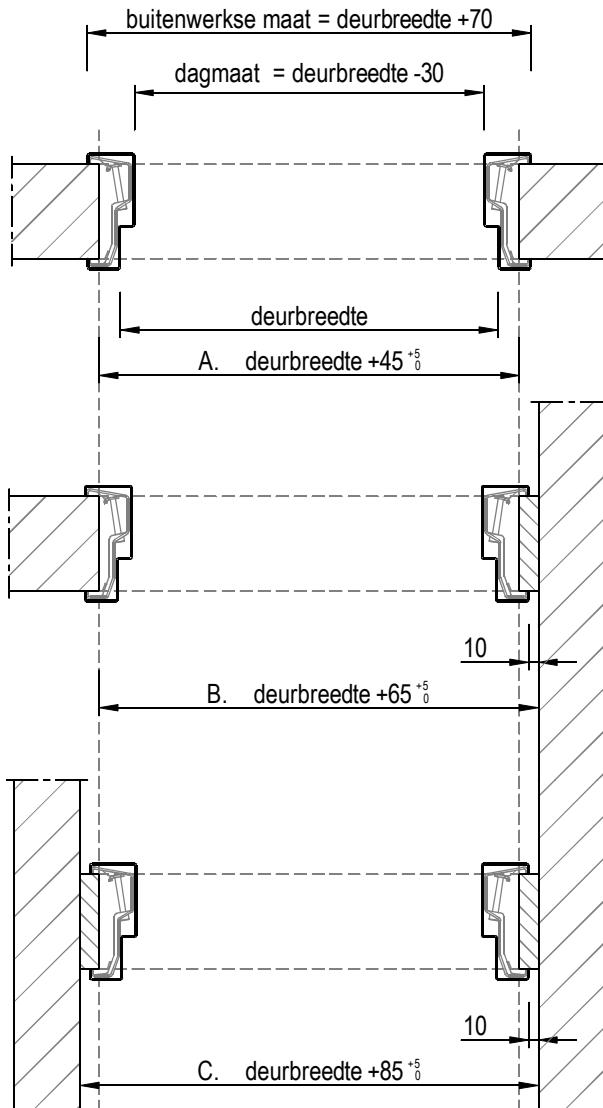


ANDUSTA

STALEN BINNENDEURKOZIJNEN

Sparingsmaten t.b.v. stomp montagekozijn

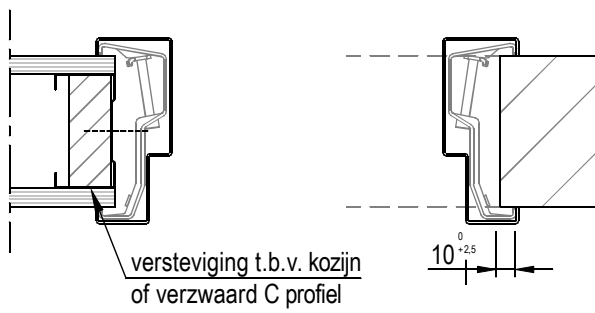

HOOGTE [mm]			sparing	sparing (+ 5 / - 5 mm.)
deur	ROD	kozijn	H	
2315	22	2374	2364	
2315	14	2366	2356	
2315	8	2360	2350	
2115	22	2174	2164	
2115	14	2166	2156	
2115	8	2160	2150	
ROD = Ruimte Onder Deur				

BREEDTE [mm]		sparing			sparing (+ 5 / 0 mm.)
deur	BWM	A.	B.	C.	
630	700	675	695	715	
680	750	725	745	765	
730	800	775	795	815	
780	850	825	845	865	
830	900	875	895	915	
880	950	925	945	965	
930	1000	975	995	1015	
980	1050	1025	1045	1065	

